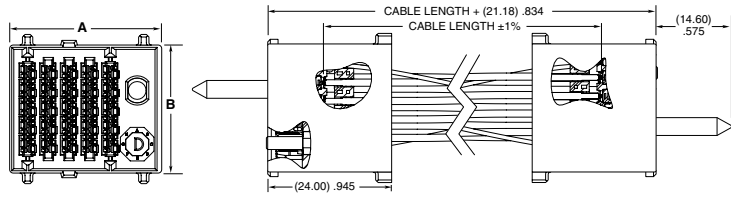


(2.00 mm) .0787" PITCH • BACKPLANE CABLES

EBCM	GAUGE/ SIG. MAP	PAIRS PER COLUMN	COLUMNS	END 1 PIN	END 1 GUIDE	END 1 KEY	CABLE LENGTH	END 2 PIN	END 2 GUIDE	END 2 KEY
Cable Header	-1 = 34 AWG/Tx to Rx Sig. Map -2 = 30 AWG/Tx to Rx Sig. Map -3 = 34 AWG/1:1 Sig. Map -4 = 30 AWG/1:1 Sig. Map	-4 = 4 Pairs -6 = 6 Pairs	-4, -6, -8, -10, -12, -14, -16	-1 = Standard	-L = Left Guidance -R = Right Guidance	-A thru -H = Position of Flat on Key (See Table) -N = No Key	"XX" = Length in Inches 06" (152.4 mm) minimum	-1 = Standard	-L = Left Guidance -R = Right Guidance	-A thru -H = Position of Flat on Key (See Table) -N = No Key

EBCM
Mates with:
EBCF, EBTf,
EBCB

NO. OF COLUMNS	A
-4	(17.45) .687
-6	(21.45) .845
-8	(25.45) 1.002
-10	(29.45) 1.159
-12	(33.45) 1.317
-14	(37.45) 1.474
-16	(41.45) 1.632

PAIRS PER COLUMN	B
-4	(24.80) .976
-6	(32.00) 1.260

END 1: -L-G SHOWN END 2

View complete specifications at: samtec.com?EBCM

EBCF	GAUGE/ SIG. MAP	PAIRS / COLUMN	COLUMNS	END 1	END 1 PIN	CABLE LENGTH	END 2 OPTION	END 2 PIN	END 2 GUIDE	END 2 KEY																																											
Cable Socket	-1 = 34 AWG/Tx to Rx Sig. Map -2 = 30 AWG/Tx to Rx Sig. Map -3 = 34 AWG/1:1 Sig. Map -4 = 30 AWG/1:1 Sig. Map	-4 = 4 Pairs -6 = 6 Pairs	-4, -6, -8, -10, -12, -14, -16	-V = Vertical Latch	-1 = Standard	"XX" = Length in Inches 06" (152.4 mm) minimum	-V = Vertical Latch -R = Right- Angle	-1 = Standard	(-R End Only) -L = Left Guidance -R = Right Guidance	(Leave Blank for no Key; -R End Only) -A thru -H = Position of Flat on Key (See Table)																																											
			<table><tr><th>NO. OF COLUMNS</th><th>A</th><th>C</th><th>E</th></tr><tr><td>-4</td><td>(10.60) .417</td><td>(14.85) .585</td><td>(19.15) .754</td></tr><tr><td>-6</td><td>(14.60) .575</td><td>(18.85) .742</td><td>(23.15) .911</td></tr><tr><td>-8</td><td>(18.60) .732</td><td>(22.85) .900</td><td>(27.15) 1.069</td></tr><tr><td>-10</td><td>(22.60) .890</td><td>(26.85) 1.057</td><td>(31.15) 1.226</td></tr><tr><td>-12</td><td>(26.60) 1.047</td><td>(30.85) 1.530</td><td>(35.15) 1.699</td></tr><tr><td>-14</td><td>(30.60) 1.205</td><td>(34.85) 1.372</td><td>(39.15) 1.541</td></tr><tr><td>-16</td><td>(34.60) 1.362</td><td>(38.85) 1.530</td><td>(43.15) 1.699</td></tr></table>	NO. OF COLUMNS	A	C	E	-4	(10.60) .417	(14.85) .585	(19.15) .754	-6	(14.60) .575	(18.85) .742	(23.15) .911	-8	(18.60) .732	(22.85) .900	(27.15) 1.069	-10	(22.60) .890	(26.85) 1.057	(31.15) 1.226	-12	(26.60) 1.047	(30.85) 1.530	(35.15) 1.699	-14	(30.60) 1.205	(34.85) 1.372	(39.15) 1.541	-16	(34.60) 1.362	(38.85) 1.530	(43.15) 1.699		<table><tr><th>PAIRS PER COLUMN</th><th>B</th><th>D</th></tr><tr><td>-4</td><td>(23.00) .906</td><td>(22.70) .894</td></tr><tr><td>-6</td><td>(30.20) 1.189</td><td>(29.90) 1.177</td></tr></table>	PAIRS PER COLUMN	B	D	-4	(23.00) .906	(22.70) .894	-6	(30.20) 1.189	(29.90) 1.177							
NO. OF COLUMNS	A	C	E																																																		
-4	(10.60) .417	(14.85) .585	(19.15) .754																																																		
-6	(14.60) .575	(18.85) .742	(23.15) .911																																																		
-8	(18.60) .732	(22.85) .900	(27.15) 1.069																																																		
-10	(22.60) .890	(26.85) 1.057	(31.15) 1.226																																																		
-12	(26.60) 1.047	(30.85) 1.530	(35.15) 1.699																																																		
-14	(30.60) 1.205	(34.85) 1.372	(39.15) 1.541																																																		
-16	(34.60) 1.362	(38.85) 1.530	(43.15) 1.699																																																		
PAIRS PER COLUMN	B	D																																																			
-4	(23.00) .906	(22.70) .894																																																			
-6	(30.20) 1.189	(29.90) 1.177																																																			

View complete specifications at: samtec.com?EBCF

Notes:

Some lengths, styles and options are non-standard, non-returnable.
ExaMAX[®] is a registered trademark of AFCL.