

0.6 mm CO-PACKAGED CABLE & INTERCONNECT


CPC	STYLE	CABLE STYLE	CABLE LENGTH	END 2	WIRING OPTION
	-01 = 8 Pairs	-1 = 34 AWG ultra low skew twinax cable	- "XX.X" = Wire Length in Inches 06.0" (152.4 mm) minimum	-02 = CPC to CPC	-1 = Pin 1 to Pin 16 -2 = Pin 1 to Pin 1

CPC

Board Mates:
CPI



PRELIMINARY

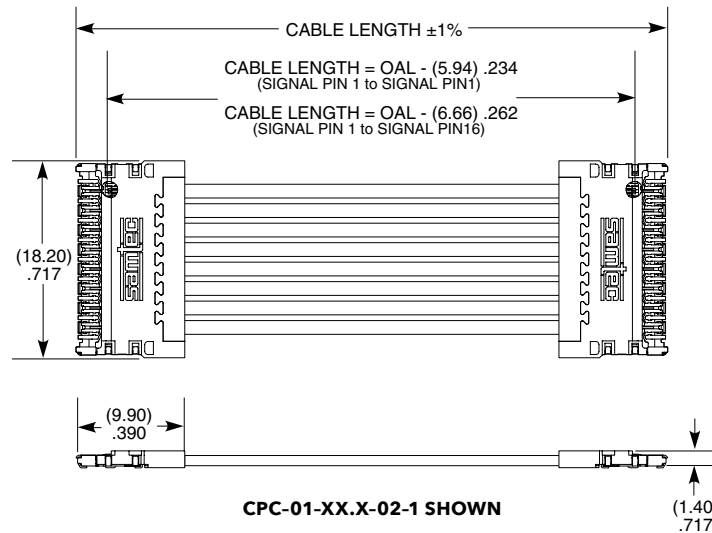

Notes:
Latching configuration not shown. Currently in development.

Cable lengths longer than 40.00" (1 meter) are not supported with S.I. test data.

View complete specifications at: samtec.com?CPC


CPI	NO OF POSITIONS	LEAD STYLE	ROW	PLATING OPTION	RA	SOLDER TYPE	WELD TAB
	-025 (Per Row) (8 Differential Pairs)	-01 = Surface Mount -02 = Overhang Mount	-1 = 1 Row -2 = 2 Row	-H = 30 μ " (0.76 μ m) Gold on contact area, Tin on tail		-2 = Lead-Free Solder Ball	-1 = Surface Mount

CPI

Cable Mates:
CPC



PRELIMINARY

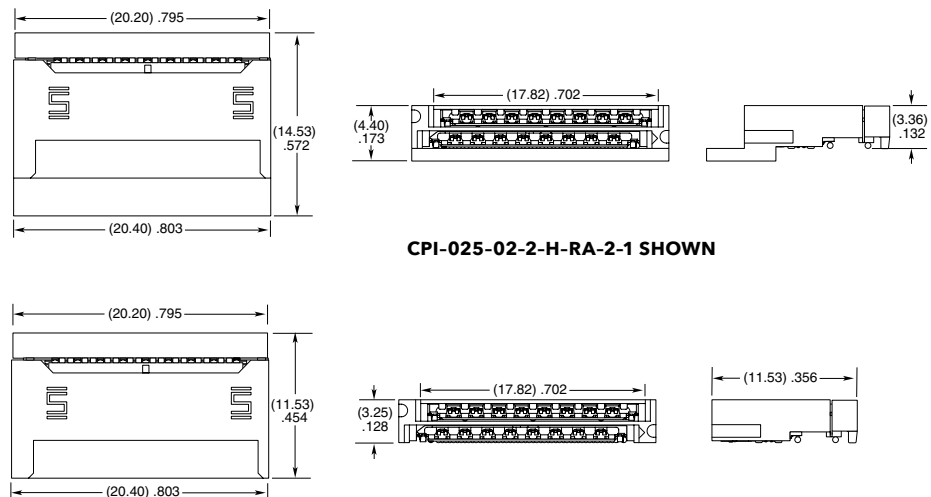

Note:
Some lengths, styles and options are non-standard, non-returnable.

View complete specifications at: samtec.com?CPI